


PLAN

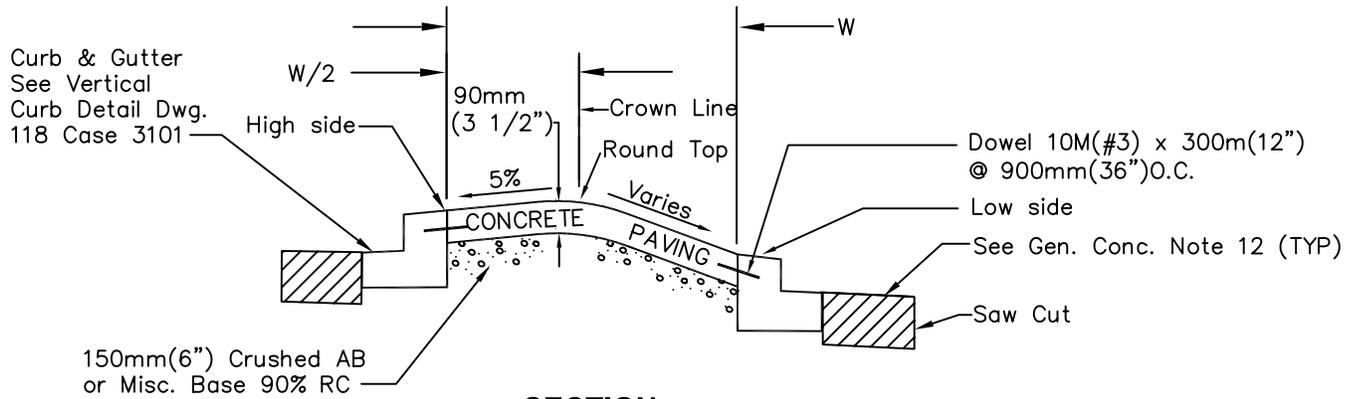


SECTION

NOTES:

1. All work shall be done in accordance with the Standard Specifications for Public Works Construction, the "GREENBOOK", the most current edition and all supplements thereto, adopted by the Southern California Chapter of the American Public Works Association and the Special Provisions (Technical Specifications) thereto adopted by the City.
2. Grade 5% from back of highest curb to center of median island. (Grade will vary from low side of curb).
3. Triangular islands – grade as shown on the project plans.
4. Island weakened-plane joints, including curb and gutter expansion or weakened-plane joints shall be aligned to match grout lines.
5. The contractor shall protect adjacent curb & gutter from color staining during stamped concrete operation.
6. Install sleeve around all sign posts. Set top of sleeve to finished grade.
7. General Concrete Notes Dwg. 104 Case 3101 shall apply.
8. Relocate and set all utility boxes to grade in one plane.

ACAD FILE NO. C3101D116 Rev1.DWG

CITY OF SAN LEANDRO * STANDARD PLANS

NO.	REVISIONS	DATE	BY	APPROVED
△	REVISED NOTES ON TRAFFIC FLOW	8/10/07	AMS	 Kenneth Joseph, City Engineer R.C.E. No.34870 Expires 9/30/09
STAMPED CONCRETE PAVING				
DRAWN	GF/MLWH/VL	CHECKED	KJ/KRC	DATE
				May 2002
				SCALE
				NONE
				SHEET
				1 OF 1
				DWG. NO. 116 CASE. 3101