


TREE PLANTING AND STAKING

* When planting in planter strip, minimum tree well width shall be (1200mm) 4' wide or width of planter strip, whichever is less. When sidewalk abutts curb, minimum tree well width shall be 900mm (3') wide or as approved by the City Engineer

Sawcut existing sidewalk

TREE WELL LAYOUT

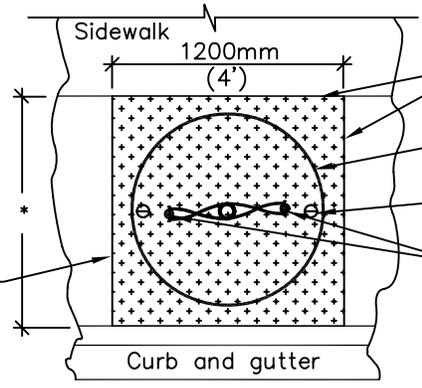

NOTES:

- All work shall be done in accordance with the Standard Specifications for Public Works Construction, the "GREENBOOK", the most current edition and all supplements thereto, adopted by the Southern California Chapter of the American Public Works Association and the Special Provisions (Technical Specifications) thereto adopted by the City.
- Temporary nursery staking shall be removed at the time of planting.
- See Dwg. 436 Case 3101 for Interlocking Paver Tree Well installation.
- See Dwg. 438A & 438B Case 3101 for Case Iron Grate Tree Well Installation.
- See Dwg. 422 Case 3101 for Irrigation Bubbler in Deep Watering Tube Installation.
- See Dwg. 442 Case 3101 for Linear Root Barrier Installation.

ACAD FILE NO. C3101D434 Rev1.DWG

CITY OF SAN LEANDRO * STANDARD PLANS

NO.	REVISIONS	DATE	BY	TREE PLANTING AND STAKING			APPROVED						
1	Add note 2, Rev numbering sequence	10/31/06	AMS				 Kenneth Joseph, City Engineer R.C.E. No.34870 Expires 9/30/09						
	Rev. Fertilizer note, Root Ball & Deep												
	Water Tuve note.												
DRAWN	GF/MLWH/VL	CHECKED	KJ/KRC	DATE	May 2002	SCALE	NONE	SHEET	1 OF 1	DWG. NO.	434	CASE.	3101