


SECTION

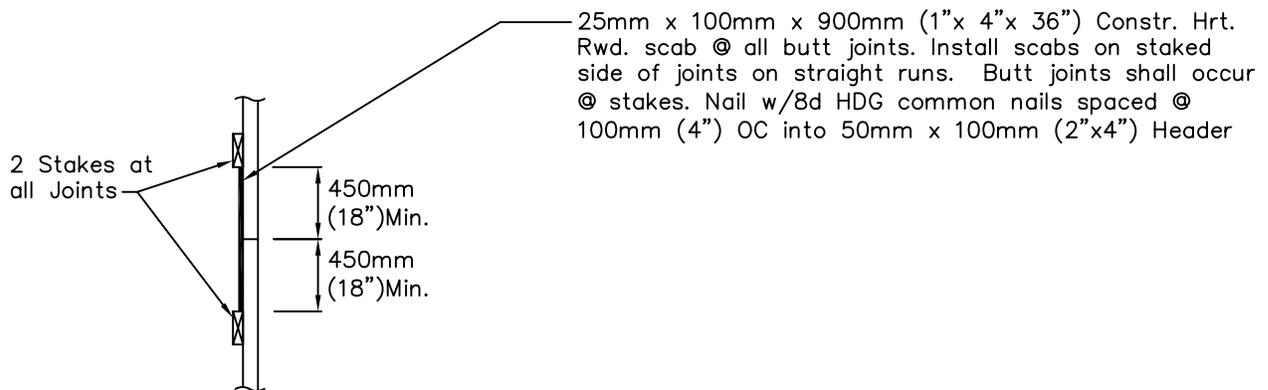


PLAN

NOTES:

1. All work shall be done in accordance with the Standard Specifications for Public Works Construction, the "GREENBOOK", the most current edition and all supplements thereto, adopted by the Southern California Chapter of the American Public Works Association and the Special Provisions (Technical Specifications) thereto adopted by the City.
- △ 2. All lumber shall be Construction Heart Redwood.
- △ 3. When required, 25mm x 100mm (1" x 4") rough sawn Constr. Hrt. Rwd. and or 9.5mm x 100mm (3/8" x 4") Constr. Hrt. Rwd. bender board shall be tightly laminated to a 50mm (2") nominal thickness and shall be nailed w/ 8d HDG common nails in staggered pattern maximum 300mm (12") spacing between nails. Redwood Header curves shall be clean, smooth, and continuous. Laminated portions shall lap into straight sections minimum 2m (6').
- △ 4. Overlap splices minimum 900mm (3'). All butt joints shall be scabbed with 25mm x 100mm x 900mm (1" x 4" x 36"). Trim to 19mm (3/4") below top of header and overlap a minimum of 450mm (18") at each board, clinch all exposed nail ends.
- △ 5. Hold finish grade for planting areas 50mm (2") below header. Match grade at turf & paved areas.
- △ 6. All nails shall be Hot Dipped Galvanized (HDG). Appropriate length stainless steel or HDG deck screws may be substituted for nails.

ACAD FILE: C3101D440 Rev1.DWG

CITY OF SAN LEANDRO * STANDARD PLANS

NO.	REVISIONS	DATE	BY	APPROVED									
△	Notes 2 & 4 incorporated into note 3 2nd part of old note 7 became note 2 re-numbered notes 1 through 6	11/1/06	AMS	 Kenneth Joseph, City Engineer R.C.E. No.34870 Expires 9/30/09									
REDWOOD HEADER													
DRAWN	GF/MLWH/VL	CHECKED	KJ/KRC	DATE	May 2002	SCALE	NONE	SHEET	1 OF 1	DWG. NO.	440	CASE.	3101