


City of San Leandro

Civic Center, 835 E. 14th Street
San Leandro, California 94577
www.sanleandro.org

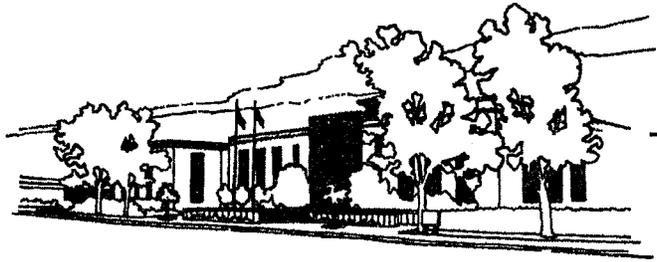

STENZEL PARK DRAINAGE PROJECT NO. 2003.0720

ADDENDUM NO. 1

June 21, 2013

TO: All Prospective Bidders

The additions and/or deletions contained in this Addendum shall be made a part of the plans and specifications and contract documents for the above described project, and shall be subject to all applicable requirements thereunder, as if originally shown and/or specified.

THE CONTRACT BOOK SHALL BE REVISED AS FOLLOWS:

SPECIFICATIONS

Item 1.0 207-17.2.3 PVC PLASTIC PERFORATED PIPE is replaced by the following:

Plastic perforated pipe shall be SDR 26 in conformance to ASTM D-3034, manufactured from a PVC compound with a cell class 12454-B as defined in ASTM D-1784, and with the following perforation arrangement:

Hole Size:	3/8"
Center-to-Center:	3" +/- 1/4"
Rows of Holes:	4 @ 105-degree +/- 5-degree & 150-degree +/- 5-degree

PLEASE NOTE:

The Bid Opening Date Remains Thursday, June 27, 2013 at 2:00 P.M.

Acknowledge this addendum and include a signed copy of the Acknowledgement Form in your Proposal. If you have any questions, please call the Project Engineer, Nelson Lam, at (510)577-3375 or via email at nlam@sanleandro.org.

Sincerely,

Kenneth Joseph, P.E., City Engineer
Engineering and Transportation Department
kjoseph@sanleandro.org

NL/lis

Stephen H. Cassidy, Mayor

City Council:

Pauline Russo Cutter

Michael J. Gregory

Benny Lee

Jim Prola

Ursula Reed

Diana M. Souza



ACKNOWLEDGEMENT ADDENDUM NO. 1

(Include a signed copy of this form in your proposal)

I hereby acknowledge receipt of this Addendum for the above noted project.

_____ Date: _____
(Signature)

(Business Name – Please Print)

cc: N. Lam, N. Thom, Kiosk
COSL Current Plan-holders