


Curb-cut ramp required when accessible route is at different level than parking elevation. See drawings 106A,B,C & D

Standard Accessible Parking Sign (R99)

accessible route

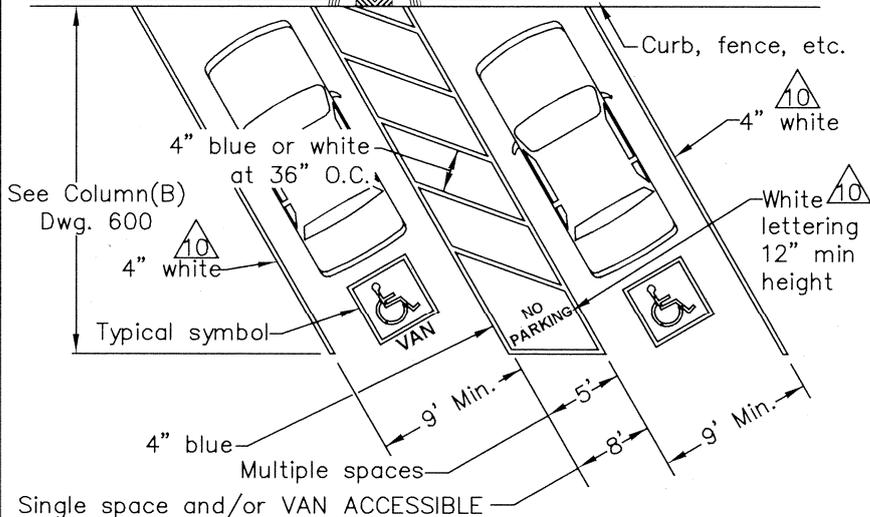


One in every eight (8) required accessible spaces, but not less than one, shall be served by a passenger side access aisle 8 feet wide minimum and shall be designated as "VAN ACCESSIBLE".

ACCESSIBLE SPACES

NOTES:

- All work shall be done in accordance with the Standard Specifications for Public Works Construction, the "GREENBOOK", the most current edition and all supplements thereto, adopted by the Southern California Chapter of the American Public Works Association and the Special Provisions (Technical Specifications) thereto adopted by the City.
- Locations and quantity of accessible spaces subject to review and approval by City.
- The parking stalls shall be marked with 4" stripes as shown and a white symbol of accessibility logo on a blue 3'-9" x 3'-9" background square in each stall. The words "NO PARKING" shall be applied within each access aisle. The letters must be a minimum of 12" tall. All stripes and pavement markings shall be thermoplastic.
- Parking stalls next to fences, walls, sidewalks or structures may be required to contain wheel stops, curbs or other protective devices.
- Wheelchair users must not be forced to go behind parked cars other than their own.
- Accessible spaces must permit use of either car door.
- Provide a reflectorized R99 and R99b sign in front of each accessible parking space. R99 and R99b signs shall be per Caltrans sign specification sheet. Sign location subject to review and approval by the City Engineer. R99 and R99b signs shall be centered at the interior end of the parking space at a minimum height of 7' above finished grade, or centered on the wall at the interior end of the parking space at a minimum height of 36" from the parking space finished grade, ground, or sidewalk.
- Van accessible parking shall have additional R7-8b sign mounted below symbol of accessibility that states "VAN ACCESSIBLE".
- A R100B sign shall also be posted, in a conspicuous place, at each entrance to an off street-parking facility, which includes the following information:
Towed vehicles may be reclaimed at the San Leandro Police Department or by telephoning (510) 577-2740.
Optionally, a R100 sign may be installed at each accessible parking space.

ACAD FILE NO. C3101D602 Rev10.dwg

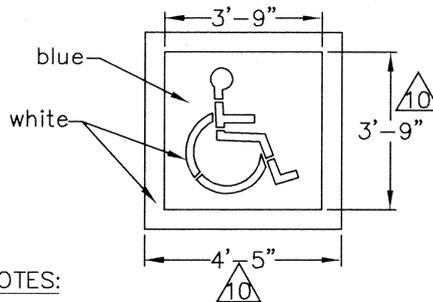

NOTES:

- White symbol of accessibility logo shall be per Caltrans specifications.
- Legend shall be Flint Trading, Inc. "PreMark" Preformed Thermoplastic Handicap Pavement Marking with ViziGRIP 336-475-6600 www.flintrading.com

WHEELCHAIR PAVEMENT LEGEND

Sign material & installation to be in accordance with Dwg. 136 Case 3101



6'-8" on private property. 7' on public property. May be 36" when posted on wall or fence.

ACCESSIBLE PARKING SIGN INSTALLATION

See Notes 7, 8 & 9

CITY OF SAN LEANDRO * STANDARD PLANS

NO.	REVISIONS	DATE	BY	APPROVED Nick Thom, City Engineer R.C.E. No.54659 Expires 12/31/17
10	Added white boarder & updated size dimensions on ADA symbol. Added 4" white. Revised note 3	10/16/16	KL	
DRAWN GF/MLWH/VL CHECKED REDIII/KJ/KRC DATE May 2002 SCALE NONE SHEET 1 OF 1				DWG. NO. 602 CASE. 3101

ACCESSIBLE PARKING SIGNING AND STRIPING