



Red Brass  
Copper 85%  
Tin 5%  
Zinc 5%  
Lead 5%

**NOTE:**

Frame and cover shall be: Phoenix Iron Works Catalog No. P-2001, D & L Supply Catalog No. K-6001, or approved equal


Disc. shall be obtained from the City of San Leandro

Spread as indicated

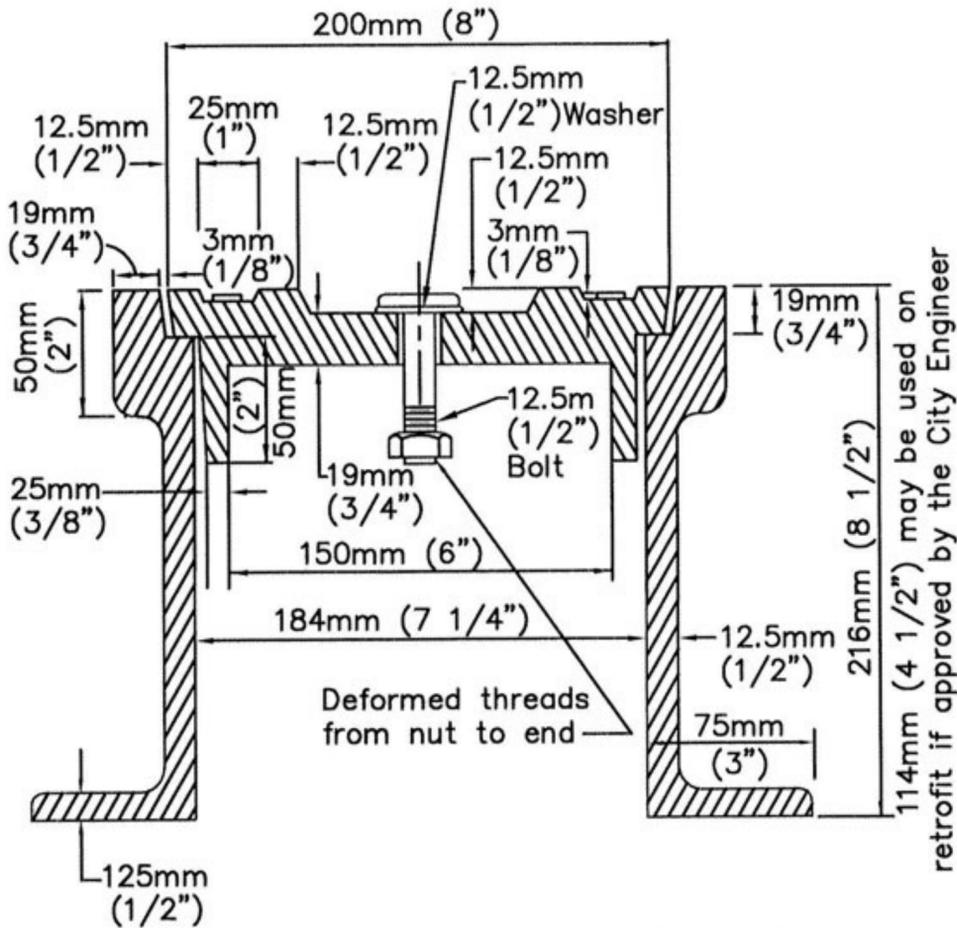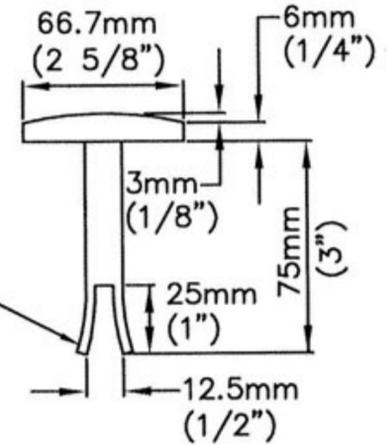

114mm (4 1/2") may be used on retrofit if approved by the City Engineer

△ 390-C-28 (660-C-4000, 7 sk, 25mm (1") Max. aggregate 4000 psi) with 2.7kg (6 lbs) of lampblack and 0.68kg (1 1/2 lbs) concrete engineered reinforcing fibers (Fibermesh or approved equal)

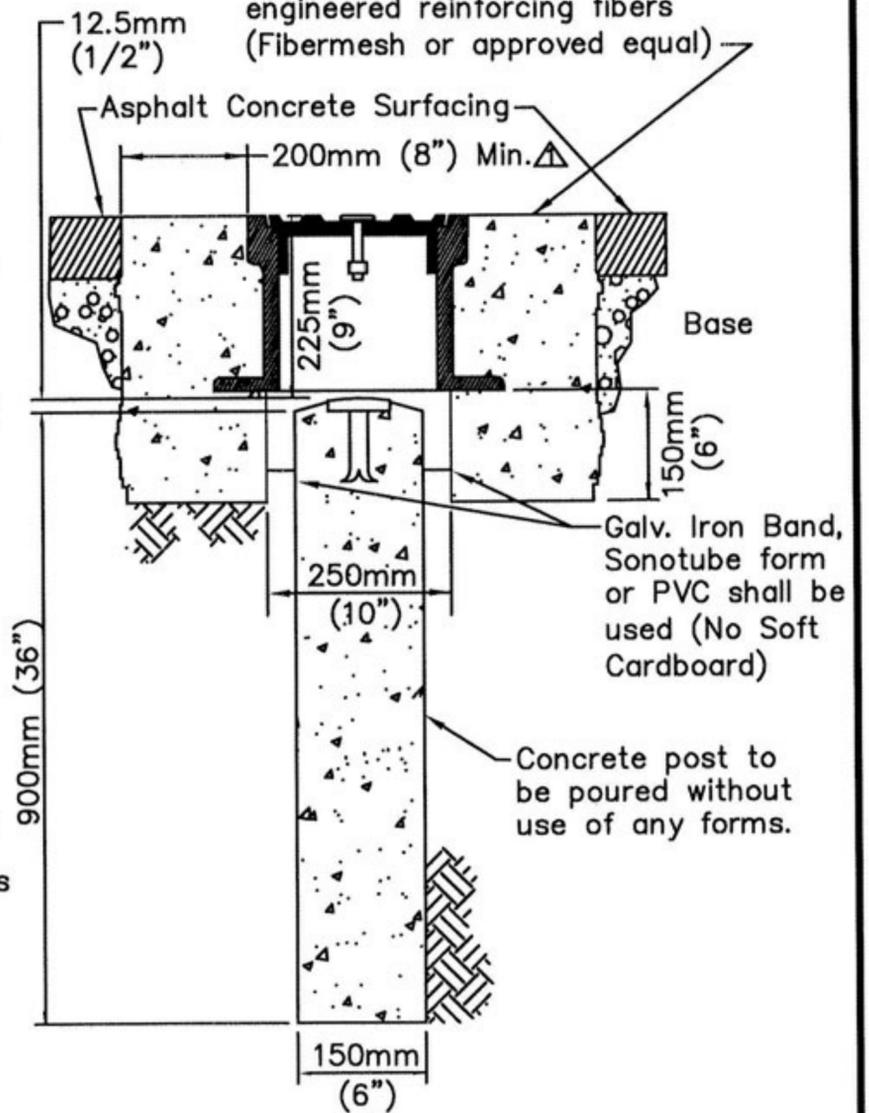

**NOTES:**

- All work shall be done in accordance with the Standard Specifications for Public Works Construction, the "GREENBOOK", the most current edition and all supplements thereto, adopted by the Southern California Chapter of the American Public Works Association and the Special Provisions (Technical Specifications) thereto adopted by the City.
- Concrete for post shall be 213-C-17 (470-C-2500, 5sk, 25mm (1") max. aggregate, 2500 psi) top of monument shall have a smooth, rounded finish.
- Installation shall conform to Utility Frame and Cover Adjustment Dwg. 222 Case 3101.

ACAD FILE. C3101D134 Rev1.DWG.

**CITY OF SAN LEANDRO \* STANDARD PLANS**

NO.	REVISIONS	DATE
△	REVISED NOTES	10/3/05

**SURVEY MONUMENT**

APPROVED  
*[Signature]*  
Kenneth Joseph, City Engineer R.C.E. No.34870  
Expires 9/30/07

DRAWN GF/MLWH/VL CHECKED KJ/KRC DATE May 2002 SCALE NONE SHEET 1 OF 1 DWG. NO. 134 CASE. 3101