


SECTION B-B

NOTES:

1. All work shall be done in accordance with the Standard Specifications for Public Works Construction, the "GREENBOOK", the most current edition and all supplements thereto, adopted by the Southern California Chapter of the American Public Works Association and the Special Provisions (Technical Specifications) thereto adopted by the City.
2. General Concrete Notes Dwg. 104 Case 3101 shall apply.
3. Existing curb, gutter and sidewalk shall be saw cut along score lines.
4. Trim pipe flush with curb face.
5. Drain may be skewed as directed by the City Engineer. Drains shall not be installed in driveway curb transitions. Maintain 300mm (12") clear from driveway approaches.
6. One drain required for each 395m² (4,250 square feet) of drained area.
7. Minimum 25mm (1") clearance between adjacent pipes.
8. 100mm (4") dia. CIP may be used for 200mm (8") curb heights.

ACAD FILE NO. C31010212.DWG.

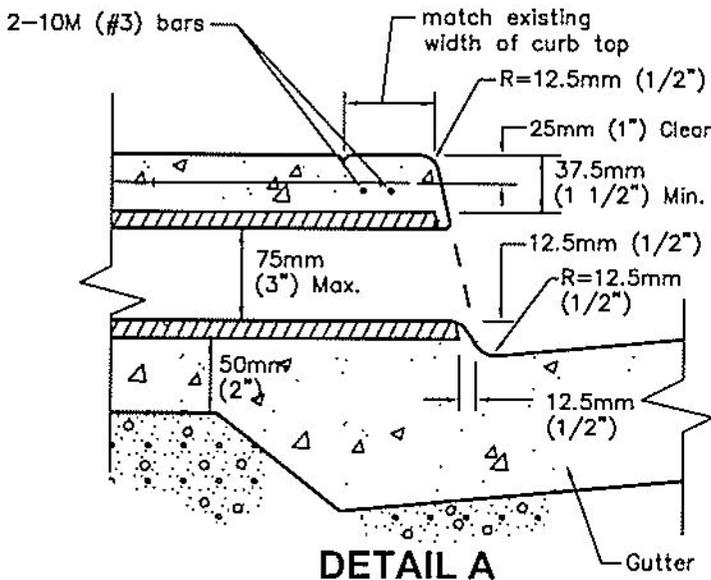

DETAIL A

CITY OF SAN LEANDRO * STANDARD PLANS

NO.	REVISIONS	DATE

CAST IRON PIPE CURB DRAIN

APPROVED *[Signature]* 6/25/02
 Kenneth Joseph, City Engineer R.C.E. #634870
 Expires 9/30/03

DRAWN GF/MLWH/VL	CHECKED KJ/KRC	DATE May 2002	SCALE NONE	SHEET 1 of 1
------------------	----------------	---------------	------------	--------------

DWG. NO. 212 CASE 3101