


City of San Leandro
Civic Center, 835 E. 14th Street
San Leandro, California 94577

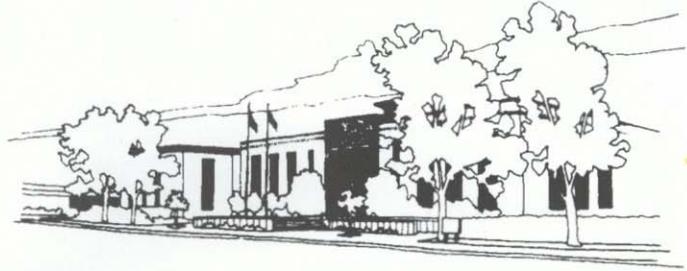

**BANCROFT MIDDLE SCHOOL PLAYFIELDS
PROJECT NO. 06-210-38-257**

ADDENDUM NO. 1

April 5, 2007

TO: All Prospective Bidders

The additions and/or deletions contained in this Addendum shall be made a part of the plans and specifications and contract documents for the above described project, and shall be subject to all applicable requirements there under, as if originally shown and/or specified.

THE CONTRACT DOCUMENTS SHALL BE REVISED AS FOLLOWS:

Drawings

Sheet 5.1 Planting and Irrigation Plan:

- Revise legend to indicate backflow to be 1-1/4 inch size.
- Revise valve symbols so that all irrigation remote control valves shall be 1-1/2 inch size.
- Add the following text to the end of note 9: "No sleeving is required for the irrigation mainline. Contractor shall install mainline within planting area where possible."
- Add the following note: "12. CONTROL WIRING CONDUIT: All remote control wiring shall installed in electrical conduit. Contractor to size conduits appropriately and provide a 1" minimum diameter."

Sheet 6.1 – Construction Details:

Detail 1 - "AC Overlay":

Add note: "Bevel edge of AC overlay at 45 degree angle where overlay is adjacent to existing fence parallel to Bancroft Avenue."

Detail 5 "Volleyball Net Post Footing"

Add note: "Contractor to install footings and sleeves only. Volleyball net posts shall be by others."

Drawing 6.3 – Construction Details:

Detail 1- "Inside Concrete Header and Perimeter Drain":

Add note: "Inside Concrete Header shall be identical to Outside Concrete Header in dimension, reinforcing, finish, and expansion joint requirements. Refer to Detail 4 on Sheet 6.1 for requirements. Provide nailer per specs continuous along inside face of header as shown on detail. Fasten nailer to inside header with 1/2" diameter by 6" long, stainless steel carriage bolts or hex head bolts at 5 feet on-center."

Detail 2 – "Composite Drain":

Add note: "Provide riser as shown at 30 feet intervals, maximum. Composite drain shall be installed along entire perimeter of the field."

Tony Santos, Mayor

City Council:

Surlene G. Grant;
Diana M. Souza;

Michael J. Gregory;
Joyce R. Starosciak;

Jim Prola;
Bill Stephens



Specifications

Section 2-5.3.4 – Supporting Information

The following submittals shall be added to the list in this section:

- Product literature for track surfacing
- Concrete header sample, to be poured in field, minimum 5 feet long, with color, texture, and expansion joint. Sample must be approved prior to construction.
- Certification of compliance for aggregate base rock.
- Basketball pole, backboard, and goal product literature.
- Volleyball sleeve product literature.
- Product literature for precast drainage structures.
- Documentation on imported borrow for plasticity index, liquid limit, gradation, and source.

Section 2-5.3.3- Shop Drawings

Add the following submittals:

- Sheeting and Shoring plan for manhole excavation.
- Track striping plan, showing all proposed track markings including yardage markers and symbols, start and finish markings, waterfall start line, and all other proposed markings. Shop drawings shall be a minimum scale of 3 inches = 1 foot.

Section 301-2.4 “Measurement and Payment – Bid Item No. 11 Aggregate Base”

Revise the unit price to be **cubic yard** for “Aggregate Base” (Bid Item No. 11). Note that this is a final pay item.

Section 301-5.2 “Imported Borrow”

The following paragraph shall be added to the end of this section:

“All imported material shall be clean, virgin material, free of organic matter and obtained directly from a quarry. Borrow material shall meet the following criteria:

- 1) Plasticity Index of 15 or less,
- 2) Liquid Limit of 30 or less, and
- 3) Percent passing a #200 sieve within the range of 8% to 40%.

Contractor to provide weighmasters tags for imported borrow. Suitable material is ‘Pleasanton 1/4” x Dust’ by Vulcan Materials in Pleasanton, CA; or equal.”

Section 303-5 “Concrete Header and Footings”

Add this following section to the special provisions:

303-5.9.4 MEASUREMENT AND PAYMENT – VOLLEY BALL POST FOOTINGS

Full compensation for furnishing all labor, material, tools, equipment and incidentals, and for doing all work involved for volleyball post footings shall be included with Bid Item 2


“General and Miscellaneous Conditions”

**PLEASE NOTE BID OPENING DATE REMAINS
MONDAY, APRIL 9, 2007 AT 3:00 P.M.**

Bancroft Middle School Playfields – Addendum No.1
Project No. 06-210-38-257
April 5, 2007
Page 3

Acknowledge this addendum in your Proposal. If you have any questions, please call the Project Engineer, Mark Goralka at (510) 577-3329.

Very truly yours,

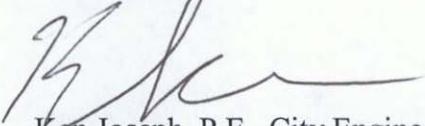

Ken Joseph, P.E., City Engineer
Engineering and Transportation Department

ACKNOWLEDGEMENT FOR ADDENDUM NO. 1

I hereby acknowledge receipt of this Addendum for the above noted project.

(Signature) Date: _____

(Company Name – Please Print)

cc: M. Goralka, G. Faria, K. Joseph, A. Osakwe, Kiosk
COSL Current Plan-holders