

City of San Leandro  
Civic Center, 835 E. 14th Street  
San Leandro, California 94577



**WPCP REHABILITATION PROJECT  
PROJECT NO. 08-593-52-239**

**ADDENDUM NO. 7**

April 6, 2011

TO: All Prospective Bidders

The additions and/or deletions contained in this Addendum shall be made a part of the plans and specifications and contract documents for the above described project, and shall be subject to all applicable requirements thereunder, as if originally shown and/or specified.

**THE CONTRACT BOOK SHALL BE REVISED AS FOLLOWS:**

**Specifications**

- Item 7.01** Section 00300, Unit Price Schedule – Delete the “Addendum 3-Unit Price Schedule” in the proposal and replace it with “Addendum 7 – Revised Unit Price Schedule”, herein attached. Bidders must submit “Addendum 7 – Revised Unit Price Schedule” with their bids.
- Item 7.02** Section 00500, Unit Price Schedule – Delete the “Addendum 3-Unit Price Schedule” in the Agreement and replace it with “Addendum 7 – Revised Unit Price Schedule”, herein attached.
- Item 7.03** Section 01140-3.04.F.4.a.1) – Revise this sentence as follows:
- “1) Existing MCC-B cannot be replaced with new distribution panel DP-65 until SWGR-3 has been energized and fully tested.”
- Item 7.04** Section 02662-2.01.C – Revise this sentence as follows:
- “C. Width: Minimum 10 feet with no factory seams.”
- Item 7.05** Section 16273-2.07.A – Revise this sentence as follows:
- “A. In accordance with ANSI C57.12.28.”
- Item 7.06** Section 16710, Fire Alarm and Smoke Detection System – Add new Section 16710 in its entirety, previously included in addendum No. 3.
- Item 7.07** Section 16711, Security System – Add new Section 16711 in its entirety, previously included in addendum No. 3.

Stephen H. Cassidy, Mayor

City Council:

Pauline Russo Cutter  
Ursula Reed

Michael J. Gregory  
Diana M. Souza

Jim Prola  
Joyce R. Starosciak




**PLEASE NOTE:**

**The Bid Opening Date is Wednesday, April 13, 2011 at 3:00 P.M.**

Acknowledge this addendum and include a signed copy of the Acknowledgement Form in your Proposal. If you have any questions, please call the Project Engineer, Kevin Chun, at 577-3412.

Very truly yours,

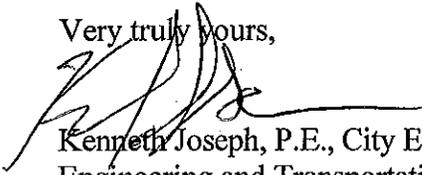

Kenneth Joseph, P.E., City Engineer  
Engineering and Transportation Department  
[kjoseph@sanleandro.org](mailto:kjoseph@sanleandro.org)  
[www.sanleandro.org](http://www.sanleandro.org)

KJ:tar

**ACKNOWLEDGEMENT ADDENDUM NO. 7**

**(Include a signed copy of this form in your proposal)**

I hereby acknowledge receipt of this Addendum for the above noted project.

\_\_\_\_\_ Date: \_\_\_\_\_  
(Signature)

\_\_\_\_\_  
(Business Name – Please Print)

cc: Internal Plans & Specs Distribution List  
COSL Current Plan-holders

## ADDENDUM 7 – REVISED UNIT PRICE SCHEDULE

The following table must be filled out complete by the Bidder as part of this Bid Proposal. This table shows Add or Deduct Unit Prices that the Bidder will accept as adjustment to the Lump Sum Base Bid for quantities of work different than indicated in the Bidding Documents the amount resulting from applying to the difference the following unit prices. The acceptance or rejection of any or all Add or Deduct Unit Prices is at the option of the Engineer and will not necessarily be made on the basis of price alone.

Item No.	Item Description	Unit	Estimated Quantity	Unit Price (in \$/Unit)
1.	Installation of epoxy injection system as indicated on Drawings 01-C-19, 20-S-01, 20-S-03, 65-S-01, 65-S-03, and 80-S-01 and as specified per 03931.	LF	1,005	
2.	Installation of concrete crack and coating as indicated on Drawings 01-C-19, 20-S-01, 20-S-03, 65-S-01, 65-S-03, and 80-S-01 and as specified per Section 03925.	SF	19,335	
3.	Installation of structural concrete repair as indicated on Drawings 01-C-19, 20-S-01, 20-S-03, 65-S-01, 65-S-03, and 80-S-01 and as specified per Section 03926.	SF	1,430	
4.	Installation of stabilized soil (soil cement) for the Equalization Basin as specified in Section 02342.	NOT USED	NOT USED	NOT USED
5.	Removal and offsite disposal at a Class II disposal facility of contaminated soils in existing onsite fills encountered during the excavation of trenches and structures and other work as specified in Section 01354 and as shown on Typical Details F020 & F021 on drawing 00-TF-01, and Typical Details P002 and P003 on drawings 00-TP-01.”	Tons	14,900	
6.	Installation of 4-foot Diameter Soil-Mix Columns as specified per Section 02250 and as indicated on Drawing 25-S-02.	LF	4,100	
7.	Removal and offsite disposal of Bay Mud and backfill of any overexcavated volume.	Tons	15,000	

<b>UNITS OF MEASURE:</b>	<b>Abbreviation</b>	<b>Word or Words</b>
	LF	Linear Feet
	SF	Square Feet
	CY	Cubic Yards

**NOTE:** The estimate of construction quantities set forth herein is approximate only, being given as a basis for the comparison of bids. The City does not expressly nor by implication agree that the actual amount of work will correspond therewith, and reserves the right to change the amount of any class or portion of the work or to omit portions of the work as may be deemed necessary or expedient by the Engineer in accordance with Section 00700-3.2 “Changes Initiated by the City.” All bids will be compared on the basis of the Engineer’s Estimate of the quantities of the work to be done. The undersigned declares, by signing this proposal, that the bidder has carefully checked all of the above figures and understands that the City shall not be responsible for any errors or omissions on the part of the undersigned in making up this bid.